


CERTIFICATE

Certified Passive House Component

Component-ID 0157cw03 valid until 31st December 2022

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

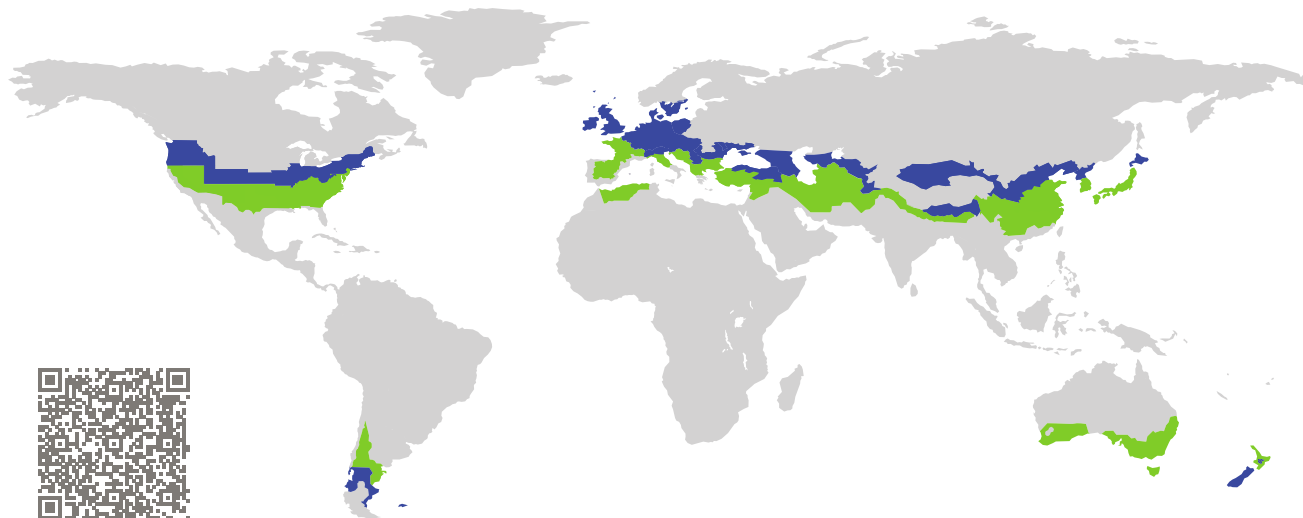


Category: **Curtain Wall**
Manufacturer: **Jansen AG,
Oberriet SG,
Switzerland**
Product name: **VISS HI (50 mm)**

**This certificate was awarded based on the following
criteria for the cool, temperate climate zone**

Comfort $U_{CW} = 0.80 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{CW, \text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$

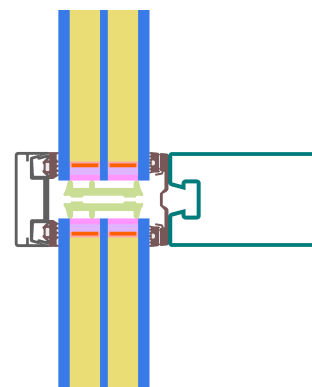

Passive House
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

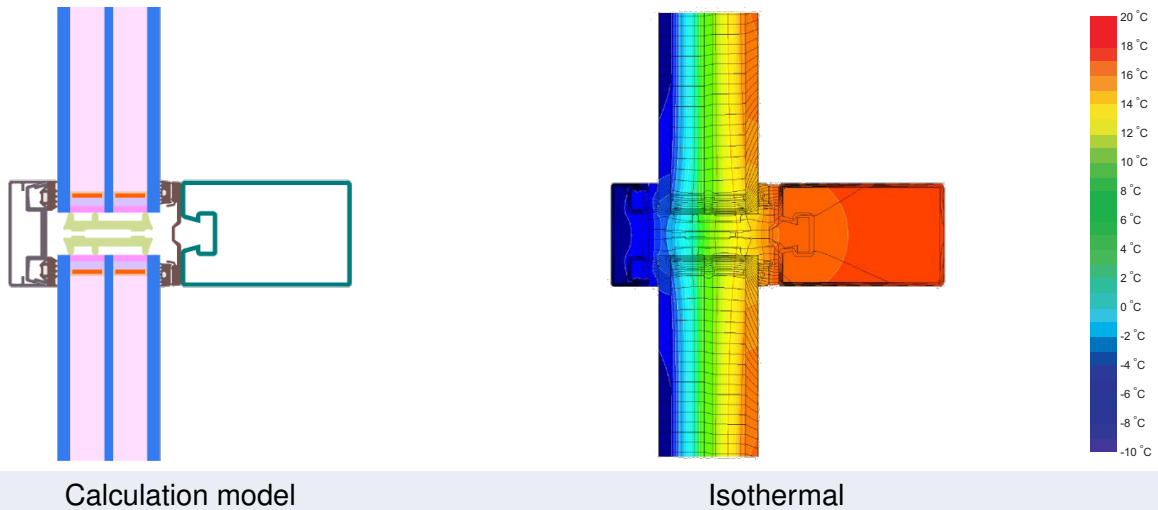

Description

Steel construction, Aluminium covering- and pressure-strip. Covering-strip with reduced emissivity ($\epsilon = 0.1$) at the inside. PE-foam insulator in the glazing rebate (0.035 W/(mK)). Plastic glass-carrier on stainless steel bolts. Thermally insulated screws. Losses by screws and glass carrier were determined by 3D-thermal flux analysis (PHI). Used Pane: 48 mm (6/16/4/16/6), intersection of the Glass: 14 mm. Used spacer: Swisspacer V. The glazing was calculated with a 3 mm secondary seal. As it is often the case that this is thicker, today the calculation is carried out with a 6 mm secondary seal. This leads to a higher glazing edge thermal bridge, which can also be estimated by way of the spacer certificates: www.passivhauskomponenten.org / glazing edge bonds. The higher rates of heat loss can be compensated for by using e. g. improved glazing.

Explanation






The element U-values were calculated for the test element size of 1.20 m × 2.50 m with $U_g = 0.70$ W/(m² K). If a higher quality glazing is used, the element U-values will improve as follows:

| | | | | | | |
|---------|----------|------|------|------|------|----------------------|
| Glazing | $U_g =$ | 0.70 | 0.69 | 0.58 | 0.53 | W/(m ² K) |
| | | ↓ | ↓ | ↓ | ↓ | |
| Element | U_{CW} | 0.80 | 0.79 | 0.69 | 0.64 | W/(m ² K) |

Transparent building components are sorted into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.


The Passive House Institute has defined international component criteria for seven climate zones. In principle, components that have been certified for climate zones with higher thermal requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

| Frame values | | | Frame width b_f mm | U -value frame U_f^1 W/(m ² K) | Ψ -glazing edge Ψ_g W/(m K) | Temp. Factor $f_{RSI=0.25}$ [-] |
|---------------|-------|---|----------------------------|---|---|---------------------------------------|
| Top fixed | (tof) |  | 50 | 0.92 | 0.037 | 0.81 |
| Side fixed | (sf) |  | 50 | 0.81 | 0.037 | 0.81 |
| Bottom fixed | (bof) |  | 50 | 0.92 | 0.037 | 0.81 |
| Mullion fixed | (m) |  | 50 | 0.81 | 0.037 | 0.81 |
| Transom fixed | (tf) |  | 50 | 0.92 | 0.037 | 0.81 |
| | | | Spacer: SWISSPACER V | | Secondary seal: Polysulfid | |

Thermal glass carrier bridge ² $\chi_{GT} = 0.008$ W/K

Validated installations

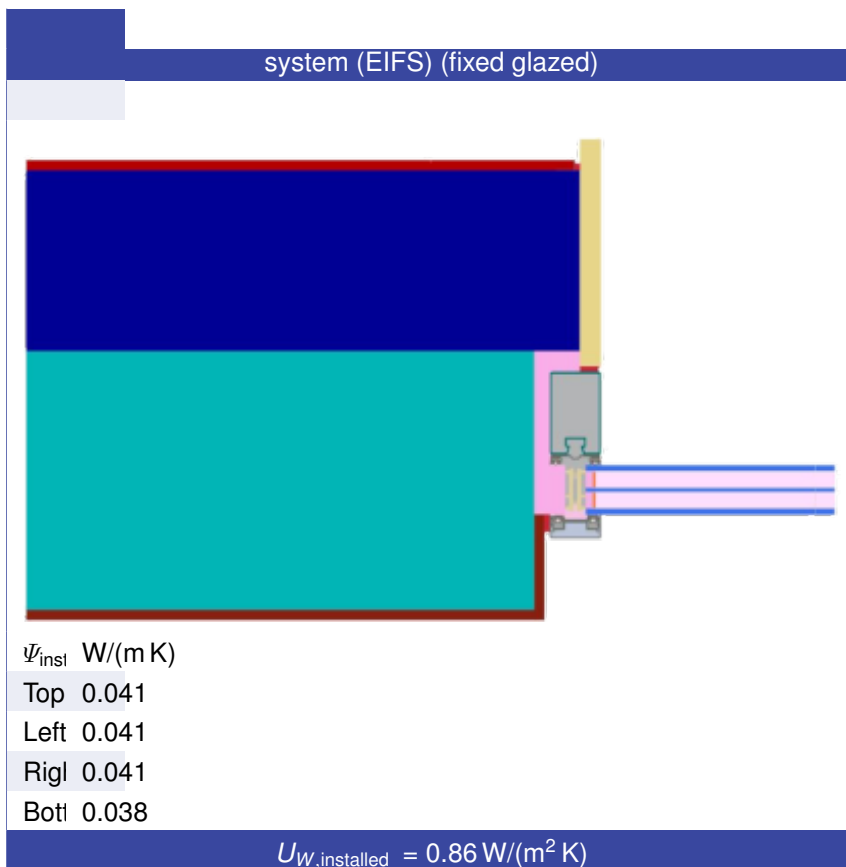

¹ Includes $\Delta U = 0.12$ W/(m² K). Determined through 3D - FEM Simulation

² Determined through 3D - FEM Simulation . Glass carrier type : Non-Metallic Glass Carrier with Screws

