



CE

Special geometry

CE marking for windows

JANSEN

Certainty through documentation – with special geometries too



Jansen windows

Security and quality are not just important for standard windows. A CE marking is now also possible for windows with special geometries as per the Construction Products Regulation (CPR) and product standard EN 14351-1.

All the necessary documents and instructions for the CE marking can be found at: docucenter.jansen.com

CE

13

Any Metal Fabricator Ltd
Any Street
Any Town, X-00000
Country

DoP No. 000000000000

Janisol 00000000

EN 14351-1:2006+A2:2016


Windows in domestic and commercial locations

Watertightness	npd
Resistance to wind load	npd
Acoustic performance	npd
Thermal transmittance U_w	npd
Radiation properties	
– Solar factor	npd
– Light transmittance	npd
Air permeability	npd

Initial Type Testing carried out and classification reports created by Ift Rosenheim NB No. 0757,
Giordano Institute NB No. 0407 and gbd LAB NB No. 2065


Summary of types

Janisol / Janisol Primo

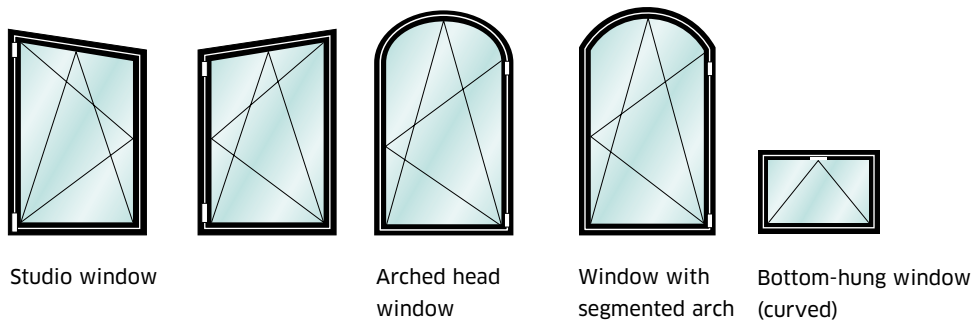


inward-opening	•	•	•	•	•	
----------------	---	---	---	---	---	--

Janisol HI

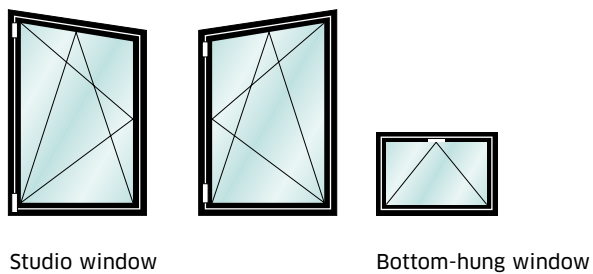

inward-opening	•	•	•			
----------------	---	---	---	--	--	--

Janisol Arte

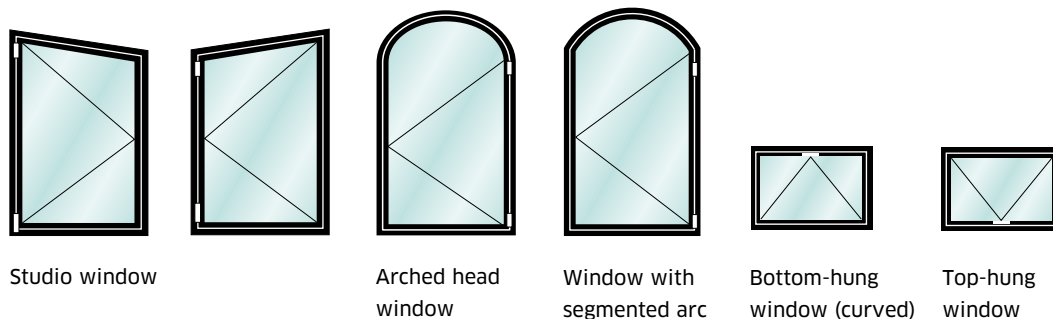

inward-opening	•	•	•	•	•	
outward-opening	•	•	•	•		•

The relevant performance values in accordance with EN 14351-1 are illustrated in the individual product ranges. The expert appraisal reports must be observed in order to achieve the maximum performance values. docucenter.jansen.com

Jansen AG

Steel Systems
Industriestrasse 34
9463 Oberriet
Schweiz
jansen.com

JANSEN